


Part-T

Indoor Lighting - Surface

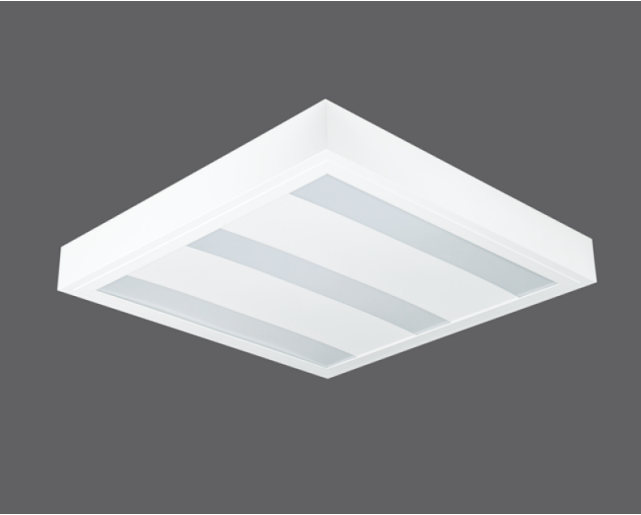

TECHNICAL INFORMATION

Housing	Sheet steel housing
Optics	UV-stabilized opal diffuser
LED Lifetime	50.000 hours
Mounting System	Surface

OPTICAL SPECIFICATIONS

Optical	Symmetrical
Light Exit Angle	120°
UGR Value	80

ELECTRICAL



Power (W)	29-41W
Power Factor	>95
Light Source	SMD Mid Power LED
Input Voltage	220-240V / 50-60 Hz

OPTIONAL

DALI
Emergency Lighting Unit
Tunable White

MOUNTING

Mounting Type	Surface
----------------------	---------

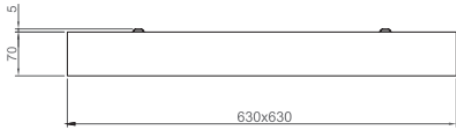

Order Code	W	Light Source	Lm	CCT	WxLxH (mm)	Kg
03149.66.30.023	29	LED Module	2920	3000	630x630x70	4.3
03149.66.40.024	29	LED Module	3000	4000	630x630x70	4.3
03149.66.30.033	41	LED Module	4100	3000	630x630x70	4.3
03149.66.40.035	41	LED Module	4210	4000	630x630x70	4.3

All electrical values given are nominal values. The luminous flux and the associated electrical load are subject to an initial tolerance of +/- 10%. Color temperature tolerance: +/-150 K. Unless otherwise stated, values are valid for an ambient temperature of 25°C.
The information containing technical parameters and product codes in the catalog and on the website may differ from standard products due to customizations made according to projects.
Ikizler Aydınlatma has the right to make changes to the products without notice. You can get up-to-date information about the products on our website.

Phone: +90 (216) 397 22 16
Fax: +90 (216) 397 19 19
E-Mail: info@ikizleraydinlatma.com

Please visit our website for our updated information. www.ikizleraydinlatma.com

