


# Nord-R

## Indoor Lighting - Suspended

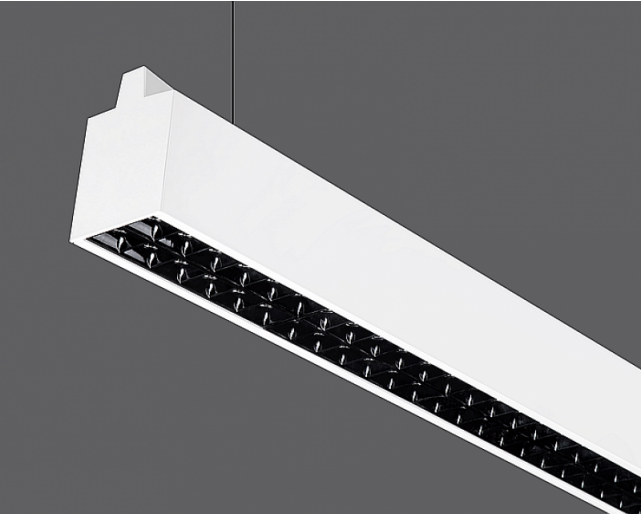

### TECHNICAL INFORMATION

<b>Housing</b>	Extruded aluminum profile
<b>Optics</b>	Dark reflector with glare control
<b>LED Lifetime</b>	50.000 hours
<b>Mounting System</b>	Pendant

### OPTICAL SPECIFICATIONS

<b>Optical</b>	Direct&Indirect
<b>Light Exit Angle</b>	36°
<b>UGR Value</b>	80

### ELECTRICAL



<b>Power (W)</b>	56-72W
<b>Power Factor</b>	>95
<b>Light Source</b>	SMD Mid Power LED
<b>Input Voltage</b>	220-240V / 50-60 Hz

### OPTIONAL


DALI  
Emergency Lighting Unit

### MOUNTING

<b>Mounting Type</b>	Pendant
----------------------	---------

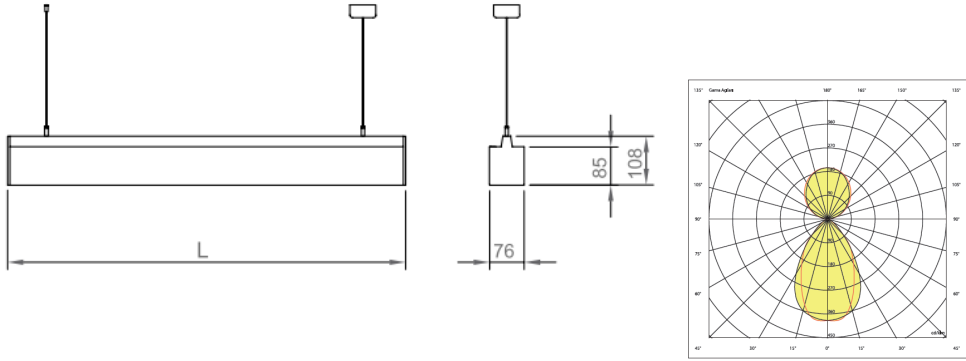

Order Code	W	Light Source	Lm	CCT	WxLxH (mm)	Kg
01181.71.30.060	56	LED Module	6040	3000	76x1125x108	3,2
01181.71.40.064	56	LED Module	6400	4000	76x1125x108	3,2
01181.71.30.081	72	LED Module	8170	3000	76x1440x108	4,0
01181.71.40.086	72	LED Module	8600	4000	76x1440x108	4,0

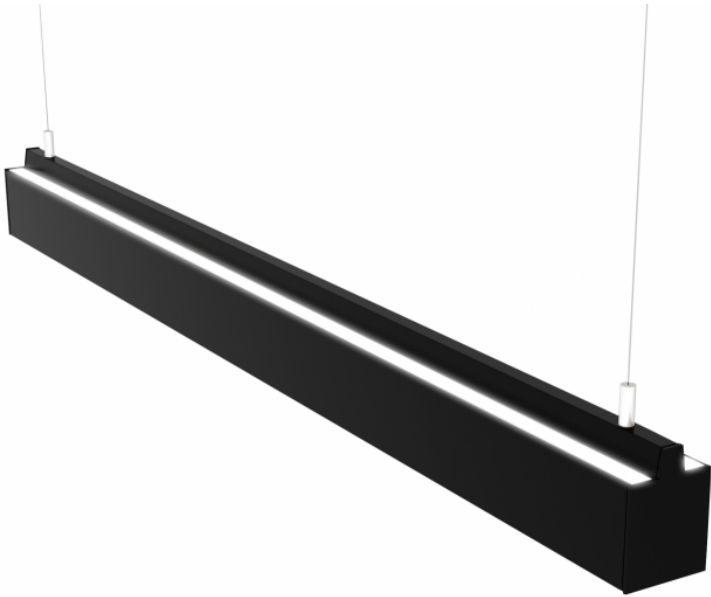

All electrical values given are nominal values. The luminous flux and the associated electrical load are subject to an initial tolerance of +/- 10%. Color temperature tolerance: +/-150 K. Unless otherwise stated, values are valid for an ambient temperature of 25°C.  
The information containing technical parameters and product codes in the catalog and on the website may differ from standard products due to customizations made according to projects.  
Ikizler Aydınlatma has the right to make changes to the products without notice. You can get up-to-date information about the products on our website.

**Phone:** +90 (216) 397 22 16  
**Fax:** +90 (216) 397 19 19  
**E-Mail:** [info@ikizleraydinlatma.com](mailto:info@ikizleraydinlatma.com)

Please visit our website for our updated information. [www.ikizleraydinlatma.com](http://www.ikizleraydinlatma.com)

