

Nest-R

Indoor Lighting - Suspended



Colour Options



Ral 9016



Ral 9006



Ral 9005

TECHNICAL INFORMATION

Housing	Extruded Aluminum Profile
Side Housing	Aluminum Injection
Reflector	Multiple Matte Black Reflector

OPTICAL SPECIFICATIONS

Optical	Symmetrical
Light Exit Angle	36°
UGR Value	CRI < 16
CRI	UGR > 80
Thousand Value	Mc Adams < 3

ELECTRICAL



Power (W)	32-41W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20°C / +50°C
LED Life L80B50	50.000 Hour

OPTIONAL

DALI
1-10V DIM
Tunable White
Emergency Lighting Unit
CRI < 90
2700~6500K
Different RAL Color Options
Plug-in Connector
Class-I Protection Class
AC-DC Supply(MBS)

MOUNTING

Mounting Type Pendant

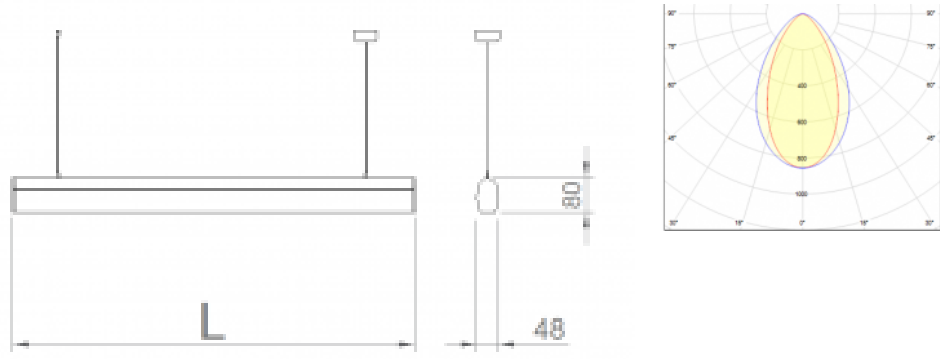

Order Code	W	Lm	CCT	Angle (°)	CRI	Dimensio n-L (mm)	Kg
01187.47.30.034	32	3270	3000	36°	Ra>80	1125	1,8
01187.47.40.037	32	3700	4000	36°	Ra>80	1125	1,8
01187.47.30.044	41	4500	3000	36°	Ra>80	1440	2,3
01187.47.40.047	41	4750	4000	36°	Ra>80	1440	2,3

All electrical values given are nominal values. The luminous flux and the associated electrical load are subject to an initial tolerance of +/- 10%. Color temperature tolerance: +/-150 K. Unless otherwise stated, values are valid for an ambient temperature of 25°C.

The information containing technical parameters and product codes in the catalog and on the website may differ from standard products due to customizations made according to projects.

Ikizler Aydınlatma has the right to make changes to the products without notice. You can get up-to-date information about the products on our website.

Phone: +90 (216) 397 22 16

Fax: +90 (216) 397 19 19

E-Mail: info@ikizleraydinlatma.com

Please visit our website for our updated information. www.ikizleraydinlatma.com

