


Styled

Indoor Lighting - Downlights & Spotlights

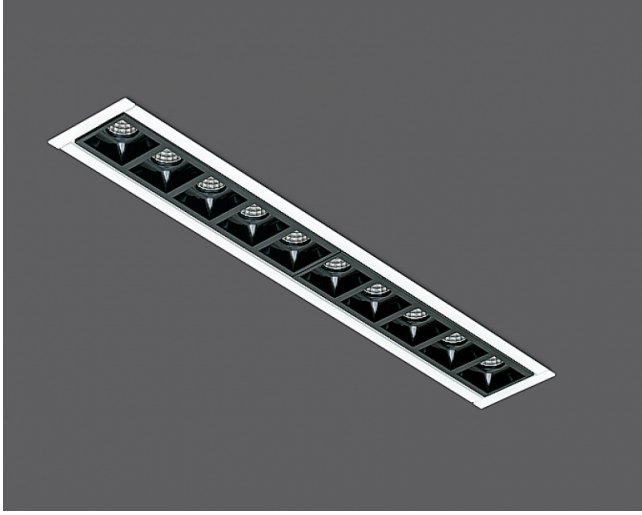

TECHNICAL INFORMATION

Housing	Sheet steel housing
Optics	Dark reflector with glare control
LED Lifetime	50.000 hours
Mounting System	Recessed

OPTICAL SPECIFICATIONS

Optical	Symmetrical
Light Exit Angle	36°
UGR Value	80

ELECTRICAL




Power (W)	11-22W
Power Factor	>95
Light Source	SMD Mid Power LED
Input Voltage	220-240V / 50-60 Hz

OPTIONAL

DALI
Emergency Lighting Unit

MOUNTING

Mounting Type	Recessed
----------------------	----------

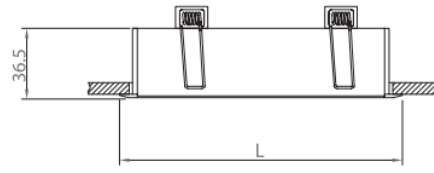

Order Code	W	Light Source	Lm	CCT	Angle (°)	WxLxH (mm)	Cut-out (mm)
05249.16.30.004	11	LED Module	1100	3000	36°	46x150x36,5	142x38
05249.16.40.005	11	LED Module	1200	4000	36°	46x150x36,5	142x38
05249.16.30.005	22	LED Module	2200	3000	36°	46x285x36,5	278x38
05249.16.40.006	22	LED Module	2400	4000	36°	46x285x36,5	278x38

All electrical values given are nominal values. The luminous flux and the associated electrical load are subject to an initial tolerance of +/- 10%. Color temperature tolerance: +/-150 K. Unless otherwise stated, values are valid for an ambient temperature of 25°C.

The information containing technical parameters and product codes in the catalog and on the website may differ from standard products due to customizations made according to projects.

Ikizler Aydınlatma has the right to make changes to the products without notice. You can get up-to-date information about the products on our website.

Phone: +90 (216) 397 22 16
Fax: +90 (216) 397 19 19
E-Mail: info@ikizleraydinlatma.com

Please visit our website for our updated information. www.ikizleraydinlatma.com

