


Rest-SQ

Acoustic Lighting - STILL Series

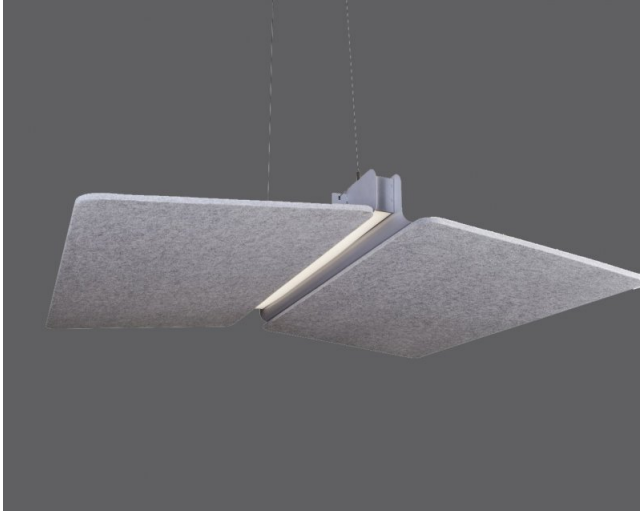

TECHNICAL INFORMATION

Housing	Extruded aluminum profile
Optics	UV-stabilized opal polycarbonate diffuser
LED Lifetime	50.000 hours
Mounting System	Pendant
Application	Combination of lighting with acoustic tiles to assist noise control

OPTICAL SPECIFICATIONS

Optical	Symmetrical
Light Exit Angle	120°
UGR Value	80

ELECTRICAL


Power (W)	29W
Power Factor	>95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V / 50-60 Hz

OPTIONAL

DALI

MOUNTING

Mounting Type Surface, Pendant

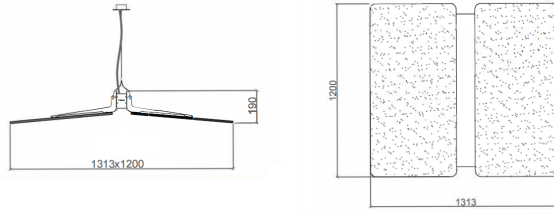

Order Code	W	Light Source	Lm	CCT	WxLxH (mm)	Kg
01183.11.30.031	29	LED Module	3100	3000	1313x1200x190	14,0
01183.11.40.032	29	LED Module	3200	4000	1313x1200x190	14,0



All electrical values given are nominal values. The luminous flux and the associated electrical load are subject to an initial tolerance of +/- 10%. Color temperature tolerance: +/-150 K. Unless otherwise stated, values are valid for an ambient temperature of 25°C.

The information containing technical parameters and product codes in the catalog and on the website may differ from standard products due to customizations made according to projects.

Ikizler Aydınlatma has the right to make changes to the products without notice. You can get up-to-date information about the products on our website.

Phone: +90 (216) 397 22 16
Fax: +90 (216) 397 19 19
E-Mail: info@ikizleraydinlatma.com

Please visit our website for our updated information. www.ikizleraydinlatma.com

ikizler