

# Corvus-T 500

Indoor Lighting - Surface



## TECHNICAL INFORMATION

<b>Housing</b>	Extruded aluminum profile housing
<b>Optics</b>	UV-stabilized opal diffuser
<b>LED Lifetime</b>	50.000 hours
<b>Mounting System</b>	Surface / Pendant

## OPTICAL SPECIFICATIONS

<b>Optical</b>	Symmetrical
<b>Light Exit Angle</b>	120°
<b>UGR Value</b>	80

## ELECTRICAL



<b>Power (W)</b>	38W
<b>Power Factor</b>	>95
<b>Light Source</b>	SMD Mid Power LED
<b>Cabling</b>	Halogen-Free
<b>Input Voltage</b>	220-240V / 50-60 Hz

## OPTIONAL

DALI  
Emergency Lighting Unit  
Tunable White

## MOUNTING

**Mounting Type** Surface, Pendant

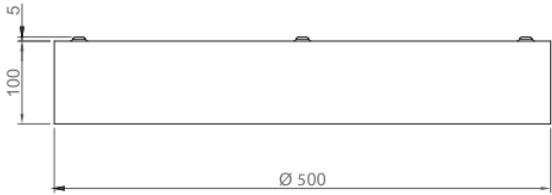

Order Code	W	Light Source	Lm	CCT	L (mm)	Kg
03170.50.30.036	38	LED Module	3800	3000	500x100	3,5
03170.50.40.039	38	LED Module	3880	4000	500x100	3,5



All electrical values given are nominal values. The luminous flux and the associated electrical load are subject to an initial tolerance of +/- 10%. Color temperature tolerance: +/-150 K. Unless otherwise stated, values are valid for an ambient temperature of 25°C.  
The information containing technical parameters and product codes in the catalog and on the website may differ from standard products due to customizations made according to projects.  
Ikizler Aydınlatma has the right to make changes to the products without notice. You can get up-to-date information about the products on our website.

**Phone:** +90 (216) 397 22 16  
**Fax:** +90 (216) 397 19 19  
**E-Mail:** info@ikizleraydinlatma.com

Please visit our website for our updated information. [www.ikizleraydinlatma.com](http://www.ikizleraydinlatma.com)

