


Mirroline

Indoor Lighting - Wall

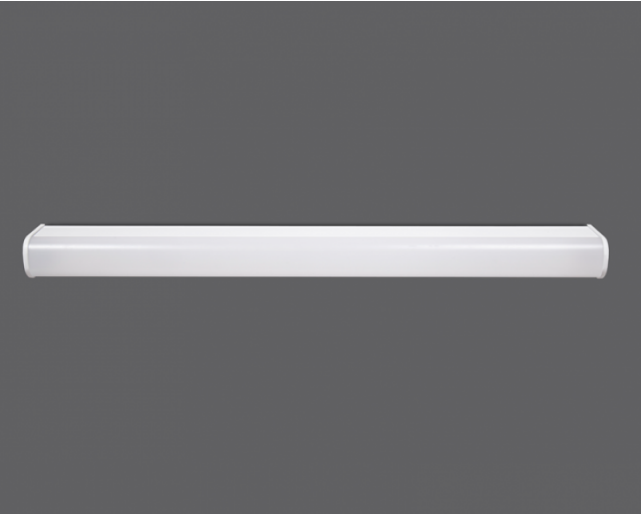

TECHNICAL INFORMATION

Housing	Extruded aluminum profile
Optics	UV-stabilized opal polycarbonate diffuser
LED Lifetime	50.000 hours
Mounting System	Wall Surface

OPTICAL SPECIFICATIONS

Optical	Symmetrical
Light Exit Angle	120°
UGR Value	80

ELECTRICAL


Power (W)	14-41W
Power Factor	>95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V / 50-60 Hz

OPTIONAL

DALI
Emergency Lighting Unit

MOUNTING

Mounting Type Surface



Order Code	W	Light Source	Lm	CCT	WxLxH (mm)	Kg
01180.46.30.016	14	LED Module	1450	3000	43x580x67	0,6
01180.46.40.018	14	LED Module	1500	4000	43x580x67	0,6
01180.46.30.032	27	LED Module	2720	3000	43x1130x67	1,1
01180.46.40.035	27	LED Module	2800	4000	43x1130x67	1,1
01180.46.30.048	41	LED Module	4160	3000	43x1680x67	1,5
01180.46.40.052	41	LED Module	4280	4000	43x1680x67	1,5

All electrical values given are nominal values. The luminous flux and the associated electrical load are subject to an initial tolerance of +/- 10%. Color temperature tolerance: +/-150 K. Unless otherwise stated, values are valid for an ambient temperature of 25°C.
The information containing technical parameters and product codes in the catalog and on the website may differ from standard products due to customizations made according to projects.
Ikizler Aydınlatma has the right to make changes to the products without notice. You can get up-to-date information about the products on our website.

Phone: +90 (216) 397 22 16
Fax: +90 (216) 397 19 19
E-Mail: info@ikizleraydinlatma.com

Please visit our website for our updated information. www.ikizleraydinlatma.com

