ANEMON-970

IP 67 | IK 09 | RoHS COMPLIANT

OPTICAL
Symmetric distribution
10°-25°-45°-120° beam angle options
UGR<25
Luminous efficacy >100 lm/W
Lifetime (L80/B20): 50000 h. (tq+25°C)
High Power LED module
Color rendering index: CRI>80

MECHANICAL
Extruded aluminium housing
Matte eloxal plated
Adjustable installation part
Acrylic optic lens for facade lighting
Tempered transparent glass
IP67 protection degree
Impact resistance IK09
Glow-wire test resistance 650°C

ELECTRICAL
Halogen-free wiring
220-240V-50/60Hz
Power factor >0.90
Constant current, Class I, isolated driver
CE - IEC 60598-1 - EN 60598-1
Ambient temperature from -20°C to +50°C
On-Off Control - (Code: .N000)

OPTIONAL
DALI - (Code: .DXXX)
Color temperature (K) options
RGB option

INSTALLATION
Surface mounted.

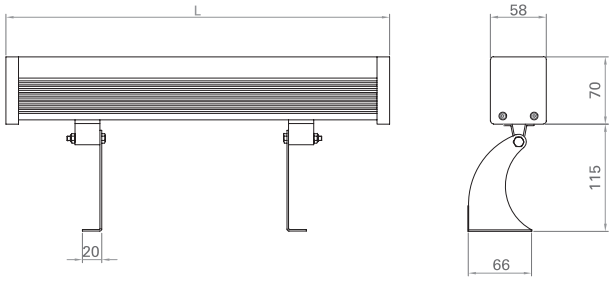

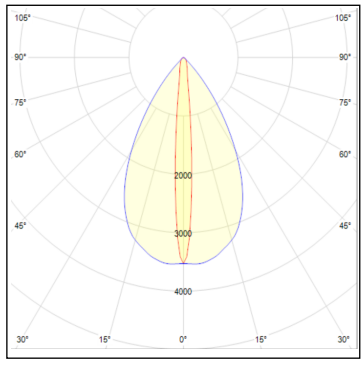

Product Code	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimensions WxLxH (mm)	Cut-Out Q (mm)	Weight (kg)
05255.97.30.040	43	4730	3000K	Ra>80	58x970x70	N/A	4,4

All electrical values given are rated values. Luminous flux and connected electrical load are subject to an initial tolerance of +/- 10%. Tolerance of colour temperature: +/-150 K. Unless stated otherwise, the values apply to an ambient temperature of 25°C.
Any information including technical parameters and product codes may differ from standard products in catalogue & web site due to customization made per projects.
Ikizler Lighting has the right to make changes or cancellations on the products without notification. Updated information on the products can be received from our web site.

Phone +90 (216) 397 22 16
Fax +90 (216) 397 19 19
E-Mail info@ikizlerlighting.com

www.ikizlerlighting.com

ikizler