

ESCAPE



Standard Colours  Ral 9016



OPTICAL

SMD LED module
Single or double sided usage
Battery charge indicator
Exit sign sticker applied on plexiglass
Viewing distance: 28 meters

MECHANICAL

Flame retardent ABS housing
Transparent plexiglass diffuser
Adjustable installation part for ceiling or wall installation
IP40 protection degree
Glow-wire test resistance 650°C

ELECTRICAL



Halogen-free wiring
220-240V-50/60Hz
3 hours Ni-Cd batteries
Over-charge and discharge protection
Ambient temperature from -20°C to +40°C

OPTIONAL

Suspension kit
Self-test button
Custom emergency pictograms

INSTALLATION

Ceiling or wall surface mounted.

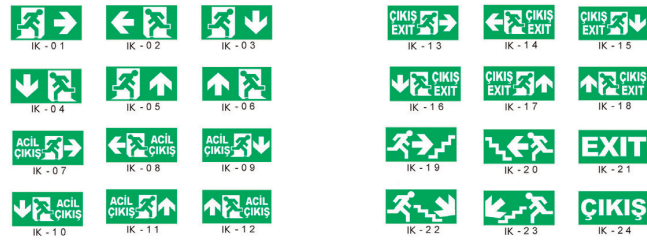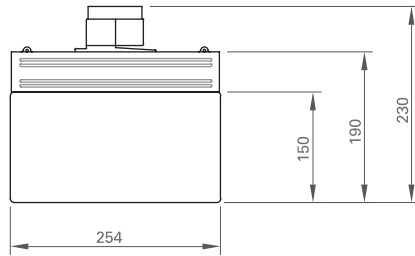

Product Code	Power (W)	Lumen (lm)	CCT (K)	Battery	Method of Usage	Dimensions LxH (mm)	Weight (kg)
80501.002.000	1,2	20	4000K	3 hours	Single sided	254x230	0,55

All electrical values given are rated values. Luminous flux and connected electrical load are subject to an initial tolerance of +/- 10%. Tolerance of colour temperature: +/-150 K. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Any information including technical parameters and product codes may differ from standard products in catalogue & web site due to customization made per projects.

Ikizler Lighting has the right to make changes or cancellations on the products without notification. Updated information on the products can be received from our web site.