


# SPACE

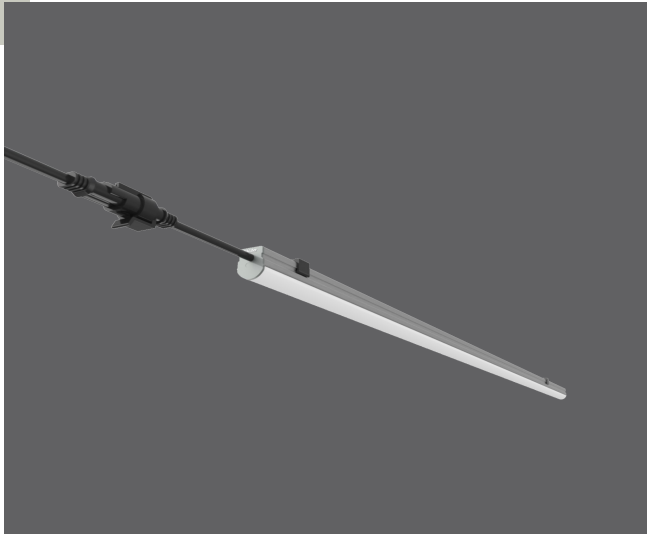

## OPTICAL

Direct symmetric distribution  
 Beam angle 120°  
 UGR <22  
 Luminous efficacy >100 lm/W  
 Lifetime (L80/B20): 50000 h.(tq+25°C)  
 SMD LED module  
 Color rendering index: CRI>80  
 MacAdams SDCM 3

## MECHANICAL

Extruded aluminium profile housing  
 Matte eloxal plated  
 UV stabilized opal polycarbonate diffuser  
 Adjustable installation part  
 IP65 protection degree  
 Impact resistance IK08  
 Glow-wire test resistance 650°C

## ELECTRICAL




Halogen-free wiring  
 220-240V-50/60Hz  
 Power factor >0.95  
 Constant current, Class I, isolated driver  
 24V external driver - 1 driver can be connected to multiple fixtures  
 CE - IEC 60598-1 - EN 60598-1  
 Ambient temperature from -20°C to +50°C  
 On-Off Control - [Code: .N000]

## OPTIONAL

DALI - [Code: .DXXX]  
 Color temperature (K) options  
 Custom sizes for continuous light

## INSTALLATION

Ceiling or wall surface mounted.

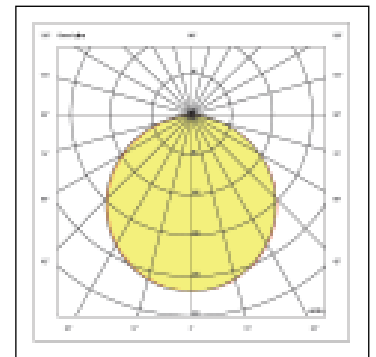

Product Code	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimensions WxLxH (mm)	Cut-Out Q (mm)	Weight (kg)
08131.05.40.007	8	675	3000K	Ra>80	21x515x22	N/A	0,25
08131.05.40.007	8	725	4000K	Ra>80	21x515x22	N/A	0,25

All electrical values given are rated values. Luminous flux and connected electrical load are subject to an initial tolerance of +/- 10%. Tolerance of colour temperature: +/-150 K. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Any information including technical parameters and product codes may differ from standard products in catalogue & web site due to customization made per projects.

Ikizler Lighting has the right to make changes or cancellations on the products without notification. Updated information on the products can be received from our web site.