

# ADELLA K2



## Standard Colours



Ral 9016

Ral 9006

Ral 9005



## OPTICAL

Adjustable light up to 30 degrees

Beam angle 45°

Luminous efficacy >100 lm/W

Lifetime (L90/B10): 50000 h. (tq+25°C)

Lifetime (L80/B20): 100000 h. (tq+25°C)

COB LED module

Color rendering index: CRI>80

MacAdams SDCM 3

## MECHANICAL

Die-cast aluminium housing

Stainless steel installation clips

Aluminium reflector

Transparent diffuser

IP40 protection degree from below

Impact resistance IK02

Glow-wire test resistance 650°C

## ELECTRICAL

Halogen-free wiring

220-240V-50/60Hz

Power factor >0.95

Constant current, Class I, isolated driver

CE - IEC 60598-1 - EN 60598-1

Ambient temperature from -20°C to +50°C

On-Off Control - (Code: .N000)

## OPTIONAL

DALI - (Code: .DXXX)

1-10V - (Code: .MXXX)

Flicker-free - (Code: .FXXX)

Emergency battery - (Code: X3HT)

CBS connection

Color rendering index: CRI >90



Color temperature (K) options

GST type connector for installation

RAL colour selection

## INSTALLATION

Ceiling recessed mounted.

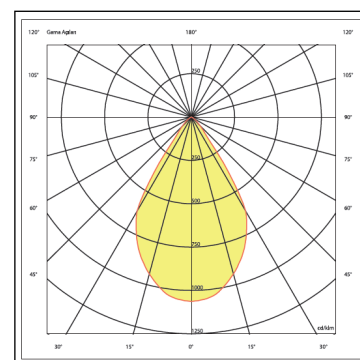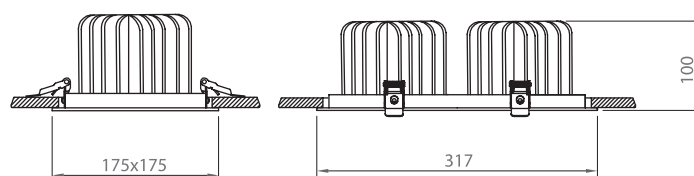

Product Code	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimensions WxLxH (mm)	Cut-Out WxL (mm)	Weight (kg)
52682.13.40.032	2x13	2800	4000K	Ra>80	175x317x100	160x302	2,9

All electrical values given are rated values. Luminous flux and connected electrical load are subject to an initial tolerance of +/- 10%. Tolerance of colour temperature: +/- 150 K. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Any information including technical parameters and product codes may differ from standard products in catalogue & web site due to customization made per projects.

Ikizler Lighting has the right to make changes or cancellations on the products without notification. Updated information on the products can be received from our web site.