# HOLLOW

**Standard Colours** Ral 9016 | Ral 9006 | Ral 9005

IP 44 | RoHS COMPLIANT | 30°

## OPTICAL
Adjustable light up to 30 degrees
Beam angle 60°
Luminous efficacy >100 lm/W
Lifetime (L90/B10): 50000 h.(tq+25°C)
Lifetime (L80/B20): 100000 h. (tq+25°C)
COB LED module
Color rendering index: CRI>80
MacAdams SDCM 3

## MECHANICAL
Die-cast aluminium housing
Stainless steel installation clips
Aluminium reflector
Transparent diffuser
IP44 protection degree from below
Impact resistance IK02
Glow-wire test resistance 650°C

## ELECTRICAL
Halogen-free wiring
220-240V-50/60Hz
Power factor >0.95
Constant current, Class I, isolated driver
CE - IEC 60598-1 - EN 60598-1
Ambient temperature from -20°C to +50°C
On-Off Control - (Code: .N000)

## OPTIONAL
DALI - (Code: .DXXX)
1-10V - (Code: .MXXX)
Flicker-free - (Code: .FXXX)
Emergency battery - (Code.X3HT)
CBS connection
Color rendering index: CRI >90
Color temperature (K) options
GST type connector for installation
RAL colour selection

## INSTALLATION
Ceiling recessed mounted.

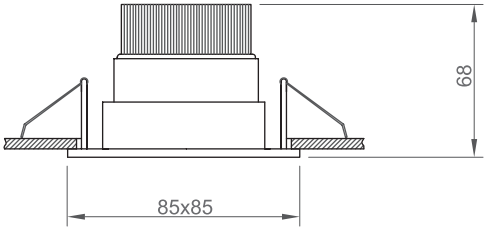


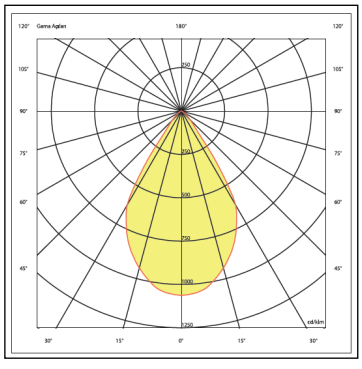

| Product Code | Power (W) | Lumen (lm) | CCT (K) | CRI | Dimensions QxH (mm) | Cut-Out Q (mm) | Weight (kg) |
|---|---|---|---|---|---|---|---|
| 05318.88.40.007 | 7 | 780 | 4000K | Ra>80 | 85x68 | 75 | 0,5 |

All electrical values given are rated values. Luminous flux and connected electrical load are subject to an initial tolerance of +/- 10%. Tolerance of colour temperature: +/-150 K. Unless stated otherwise, the values apply to an ambient temperature of 25°C.
Any information including technical parameters and product codes may differ from standard products in catalogue & web site due to customization made per projects.
Ikizler Lighting has the right to make changes or cancellations on the products without notification. Updated information on the products can be received from our web site.

Phone +90 (216) 397 22 16
Fax +90 (216) 397 19 19
E-Mail info@ikizlerlighting.com
www.ikizlerlighting.com

ikizler