


# SILVERPIT-118



## Standard Colours



## OPTICAL

Direct symmetric distribution  
 Beam angle 45°  
 UGR<16  
 Luminous efficacy >100 lm/W  
 Lifetime (L90/B10): 50000 h.(tq+25°C)  
 Lifetime (L80/B20): 100000 h. (tq+25°C)  
 COB LED module  
 Color rendering index: CRI>80  
 MacAdams SDCM 3

## MECHANICAL

Aluminium housing  
 Stainless steel installation clips  
 Matte silver reflector with glare control  
 IP40 protection degree from below  
 Impact resistance IK02  
 Glow-wire test resistance 650°C

## ELECTRICAL



Halogen-free wiring  
 220-240V-50/60Hz  
 Power factor >0.95  
 Constant current, Class I, isolated driver  
 CE - IEC 60598-1 - EN 60598-1  
 Ambient temperature from -20°C to +50°C  
 On-Off Control - (Code: .N000)

## OPTIONAL

DALI - (Code: .DXXX)  
 1-10V - (Code: .MXXX)  
 Flicker-free - (Code: .FXXX)  
 Emergency battery - (Code.X3HT)  
 CBS connection  
 Color rendering index: CRI >90  
 Color temperature (K) options  
 GST type connector for installation  
 RAL colour selection

## INSTALLATION

Ceiling recessed mounted.

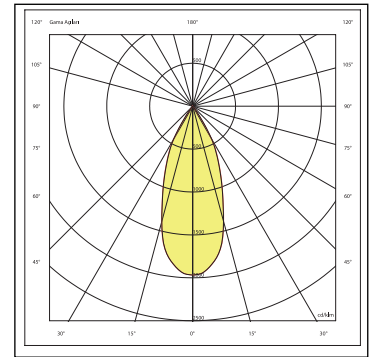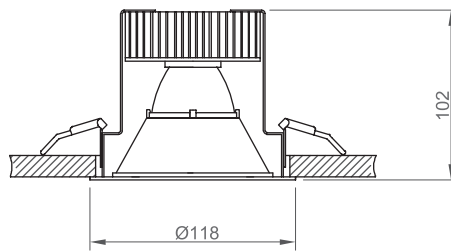

Product Code	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimensions QxH (mm)	Cut-Out Q (mm)	Weight (kg)
05113.11.40.015	14	1520	4000K	Ra>80	118x102	105	0,5

All electrical values given are rated values. Luminous flux and connected electrical load are subject to an initial tolerance of +/- 10%. Tolerance of colour temperature: +/-150 K. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Any information including technical parameters and product codes may differ from standard products in catalogue & web site due to customization made per projects.

Ikizler Lighting has the right to make changes or cancellations on the products without notification. Updated information on the products can be received from our web site.