

since | 1982

'STILL' at last...

*get a **REST**, find your **FOCUS**, stay **CALM**, add 'VALUE' to Work Culture !*

designed by Ece Yalim Design Studio



STILL Acoustic Lighting Series by


> www.ikizlerlighting.com

 **ikizler**
"worth the light"


'STILL' at last...

Work culture is what makes a company valuable...

STILL Acoustic Lighting Series is designed to add more value to your office culture and answer light and acoustic needs in one product, concentrating not only on the vision but also on other senses. The integration of acoustic panels and light unit brings 'Values' to office spaces such as 'Serenity' 'Concentration' and 'Comfort' leading to motivation, creativity, ease of cognition and of course harmony in a work environment...

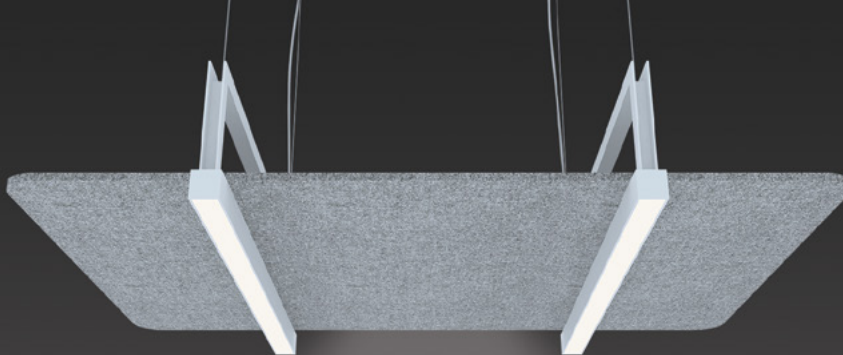


**STAY
Bar**

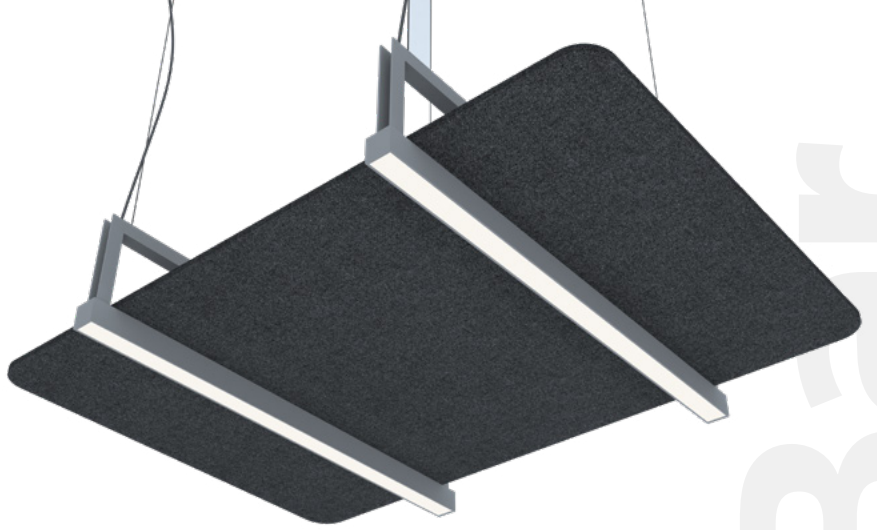

Stay-BAR


As being another member of STILL Series, Stay-BAR is designed as a multi functional product which carries acoustic panels when used in pair, aiming to offer a solution to a certain extend for commonly defined acoustic problems in work environments, while answering today's Linear LED lighting demand.

BAR implements the multi task mission of STILL Acoustic Lighting Series in a very humble way by means of its straight forward design solution and simple form language.

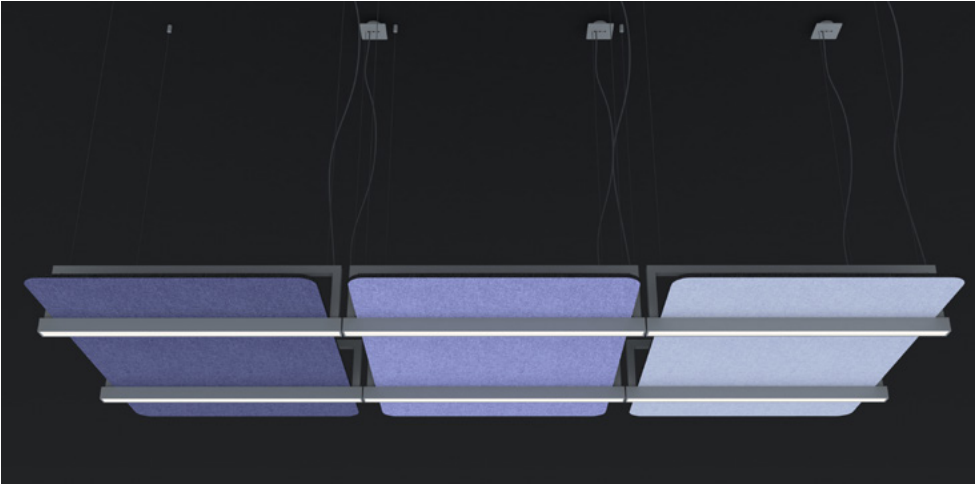


Multiple Usage

The fixture, may present either a still appeareance totally integrated to the space just like a ceiling , or a dynamic, rich visual language, depending on the different rhythmical applications preferred by interior architechts.

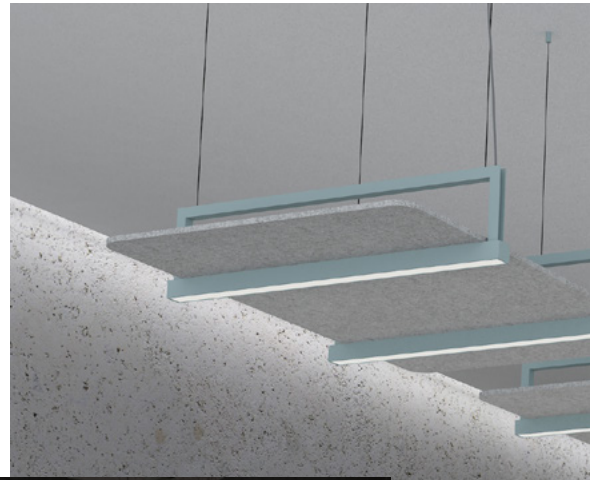



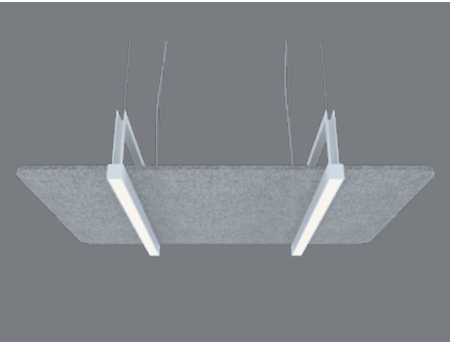

Aluminum housing
color options






RAL 9016




RAL 9006



RAL 9005

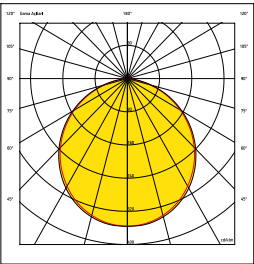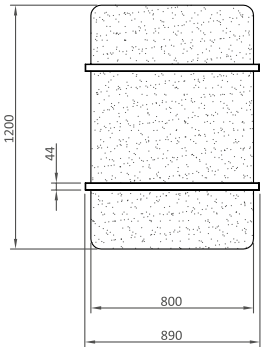

Housing	Aluminum profile with electrostatic coating
Optics	Highly transmissive opal diffuser
Light Source	High efficacy Mid Power LED with lifetime L80B50 >50,000 h
Driver	Constant current output, Pf>0.90
Supply Voltage	220-240V/50-60Hz
Ambient Temperature	-20C/+40C
Options	Dali



Order Code	W	Lm	CCT	CRI	Kg
01149.81.30.042	33	3430	3000	Ra>80	14,0
01149.81.40.045	33	3630	4000	Ra>80	14,0

Sound Absorbing Panel

Made of non hazardous, 100% Polyester fiber material. It is sound absorbent and flame retardant.

High Acoustic performance (EN-11654) up to class A Fire Reterdant and self-extinguishing (EN-13501) B, S1, d0 Low VOC, formaldehyede-free (ISO-14184) 99.9%

Antibacterial structure (ISO-20743)

Long lashing moulded and resistant to impact, moisture and humidity

Easy to clean with a damp cloth or vacuum cleaner

Recycle, sustainable


Color Options



SILVER GREY
FLT02



ANTHRACITE GREY
FLT01

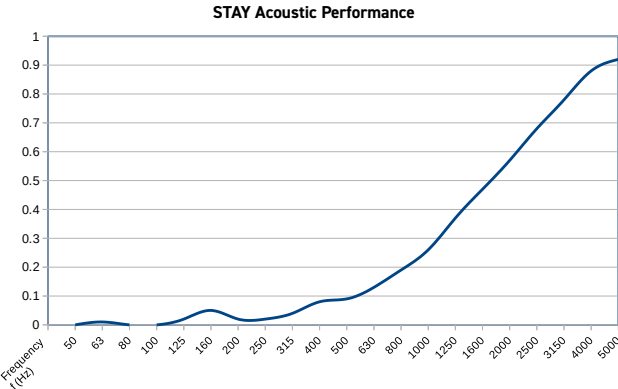

FLAME RETARDANT TEST RESULTS			
Test Method	Parameter	Parameter	Passing Criteria
TS EN ISO 11925-2	Fs ≤ 150mm ignition of filter paper	Yes No	Yes (B-D) No (d0)
TS EN 13823	FIGRA _{0.2 MJ} [W/s]	15.9	≤ 120 (B)
	THR _{600 s} (MJ)	1.7	≤ 7.5 (B)
	LFS < edge of specimen	(-)	Yes (B)
	SMOGRA [m²/s²]	0.0	≤ 30 (s1)
	TSP _{600 s} [m²]	2.2	≤ 50 (s1)
	No flaming droplets/ particles in 600s	No	No (d0)

SOUND ABSORPTION CHARACTERISTICS				
	NRC*	αw**	Class***	Surface Area
50mm Gap	0,44	0,35	D	0,96 m²

* Average sound absorption coefficient between 250 - 2000Hz

** Weighted sound energy absorption cooefficient

*** Performance class acc. To TS EN ISO 354 standard