

# PLATE



## OPTICAL

Direct symmetrical light distribution  
120° beam angle  
Lifetime (L80/B20): 50000 h. (tq+25°C)  
SMD LED module  
Color rendering index: CRI>80

## MECHANICAL

Die-cast aluminium housing  
Opal polycarbonate diffuser  
Stainless steel screws  
IP65 protection degree  
Impact resistance IK08

## ELECTRICAL



Halogen-free wiring  
220-240V-50/60Hz  
Power factor >0.95  
Constant current, Class I, isolated driver  
CE - IEC 60598-1 - EN 60598-1  
Ambient temperature from -20°C to +50°C  
On-Off Control - (Code: .N000)

## OPTIONAL

DALI (Code: .DXXX)  
Color temperature (K) options  
RAL colour selection

## INSTALLATION

Ceiling or wall surface mounted.

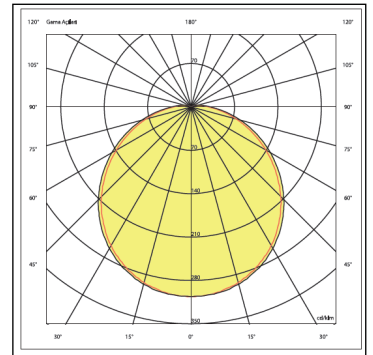

Product Code	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimensions QxH (mm)	Cut-Out Q (mm)	Weight (kg)
09112.27.40.023	28	2600	4000K	Ra>80	275x80	N/A	1,3

All electrical values given are rated values. Luminous flux and connected electrical load are subject to an initial tolerance of +/- 10%. Tolerance of colour temperature: +/-150 K. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Any information including technical parameters and product codes may differ from standard products in catalogue & web site due to customization made per projects.

Ikizler Lighting has the right to make changes or cancellations on the products without notification. Updated information on the products can be received from our web site.