



RUNNING continuous linear lighting fixtures provides users with alternative solutions with high energy conservation, low maintenance costs. Due to its plug-in assembly concept, it can be applied to both new and retrofit projects. With dimension, optics and lumen package configurations, RUNNING Continuous Lighting system offers various application opportunities especially in industrial and commercial spaces. LED technology brings an exceptional 50% energy conservation and tip the scale in favor of RUNNING in factory, warehouse and supermarket projects where maintenance costs have a great importance.



100'DEN FAZLA
ÜRÜN

RUNNING




Housing	Extruded aluminum profile with electrostatic coating
Optics	Highly transmissive opal diffuser
Light Source	High efficacy Mid Power LED with lifetime L80B50 > 50,000h
Driver	Constant current output, P _f >0.90
Supply Voltage	220-240V/50-60Hz
Ambient Temperature	-20C°/+40C°
Options	Dali 3 hour emergency lighting kit

Color Options

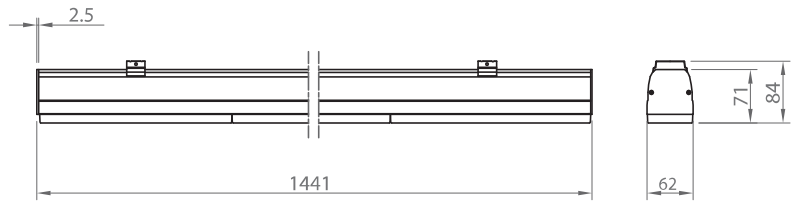

Surface Mounting And Suspension



Steel Suspension Kit



Order Code	W	Lm	CCT	CRI	Kg
72038.15.30.085	65	8530	3000	Ra>80	3,1
72038.15.40.089	65	8900	4000	Ra>80	3,1
72039.15.30.065	53	6635	3000	Ra>80	3,1
72039.15.40.068	53	6825	4000	Ra>80	3,1



RUNNING Trunking System

Running Energy Transfer Body



Housing	Extruded aluminum profile with electrostatic coating
Options	Dali 3 hour emergency lighting

* **Body System (Without Cap)**

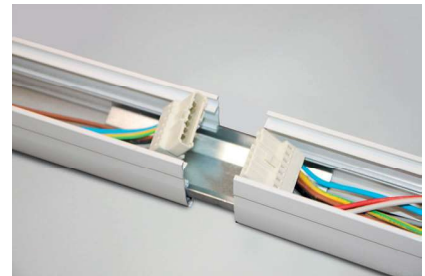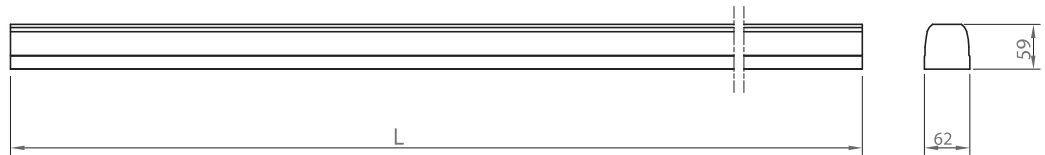


Order Code	Cable	Description	L (mm)	Kg
72530.05.100	5 core	on/off	1436	1,8
72730.05.100	7 core	Dali	1436	1,9
72930.05.100	9 core	Dali + Emergency Kit	1436	2,0
72530.05.200	5 core	on/off	2872	3,6
72730.05.200	7 core	Dali	2872	3,8
72930.05.200	9 core	Dali + Emergency Kit	2872	4,0
72530.05.300	5 core	on/off	4308	5,4
72730.05.300	7 core	Dali	4308	5,7
72930.05.300	9 core	Dali + Emergency Kit	4308	6,0




RUNNING Optic Units

60°





Order Code	W	Lm	CCT	CRI	Kg
72038.15.30.085	65	8530	3000	Ra>80	3,1
72038.15.30.070	53	6635	3000	Ra>80	3,1
72038.15.40.089	65	8900	4000	Ra>80	3,1
72038.15.40.071	53	6825	4000	Ra>80	3,1

Asymmetric



Order Code	W	Lm	CCT	CRI	Kg
72039.15.30.065	53	6635	3000	Ra>80	3,1
72039.15.40.067	53	6825	4000	Ra>80	3,1


Double Asymmetric




Order Code	W	Lm	CCT	CRI	Kg
72039.15.30.067.N000	53	6635	3000	Ra>80	3,1
72039.15.40.066.N000	53	6825	4000	Ra>80	3,1

Running System Units

Connector

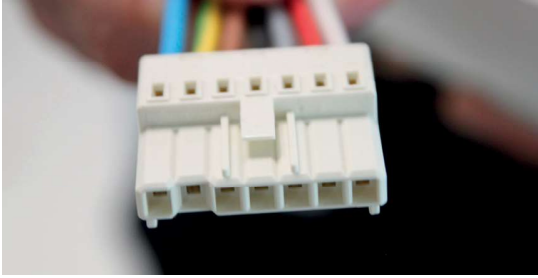


Blind Cover

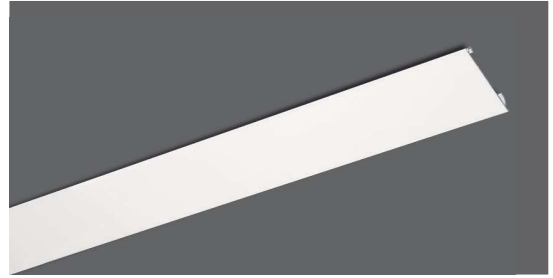

Running Accesories

Joint Piece

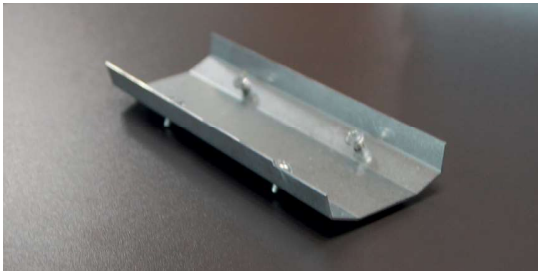

Surface Mounting and Suspension Part



End Cap



Steel Suspension Kit

