


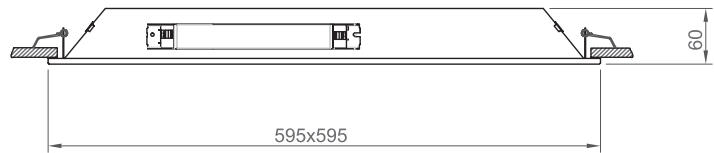





Housing	Electrostatic coated steel sheet
Diffuser	Highly transmissive opal diffuser
Light Source	High efficacy Mid Power LED with lifetime L80B50 > 50,000h
Driver	Constant current output, Pf>0.90
Supply Voltage	220-240V/50-60Hz
Ambient Temperature	-20C°/+40C°
Options	Dali 3 hour emergency lighting kit

Color Options



Ceiling Type-Cut-out

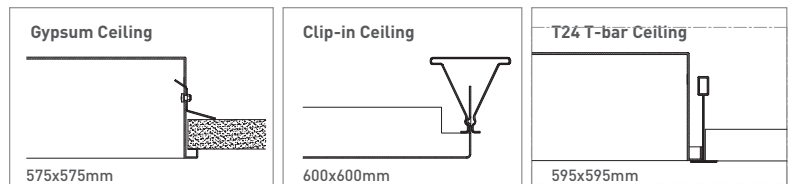

Order Code	W	Lm	CCT	CRI	Kg
02172.66.30.032	28	2700	3000	Ra>80	3.1
02172.66.40.033	28	2800	4000	Ra>80	3.1