

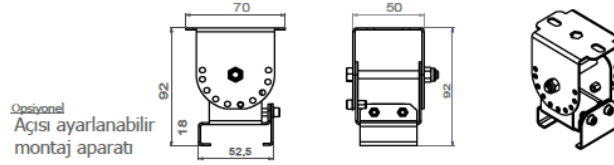


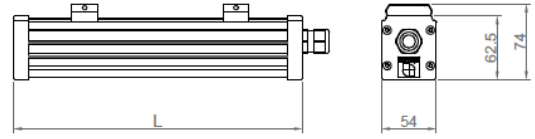

Gövde	Ekstruzyon alüminyum profil
Boya / Renk	Gri Elokstal kaplama /İsteğe göre RAL 9016 Beyaz, RAL9006 Mat Gri, RAL 9005 Mat Siyah
Cam	Şeffaf Temperli Cam /(opsiyonel kumlu cam)
LED Ömür L80B50	50.000 saat
Montaj Sistemi	Sıva Üstü / (opsiyonel açı ayarlanabilir aparat)



Sipariş Kodu	W	Lm	CCT	CRI	WxLxH (mm)
01192.66.30.010	10	990	3000	Ra>80	54x316x63
01192.66.40.012	10	1040	4000	Ra>80	54x316x63
01192.66.30.020	18	1980	3000	Ra>80	54x596x63
01192.66.40.021	18	2080	4000	Ra>80	54x596x63
01192.66.30.029	26	2970	3000	Ra>80	54x876x63
01192.66.40.031	26	3120	4000	Ra>80	54x876x63
01192.66.30.040	35	3960	3000	Ra>80	54x1156x63
01192.66.40.042	35	4160	4000	Ra>80	54x1156x63
01192.66.30.039	44	3900	3000	Ra>80	54x1436x63
01192.66.40.041	44	4200	4000	Ra>80	54x1436x63