

# SNOW-014



## Standard Colours



Ral 9016

Ral 9006

Ral 9005



## OPTICAL

Direct symmetric distribution  
Beam angle 120°  
UGR <22  
Luminous efficacy >100 lm/W  
Lifetime (L90/B10): 50000 h. (tq+25°C)  
Lifetime (L80/B20): 100000 h. (tq+25°C)  
SMD LED module  
Color rendering index: CRI>80  
MacAdams SDCM 3

## MECHANICAL

Die-cast aluminium housing  
Aluminium frame  
Stainless steel installation clips  
UV stabilized opal diffuser  
IP44 protection degree from below  
Impact resistance IK02  
Glow-wire test resistance 650°C

## ELECTRICAL



Halogen-free wiring  
220-240V-50/60Hz  
Power factor >0.95  
Constant current, Class I, isolated driver  
CE - IEC 60598-1 - EN 60598-1  
Ambient temperature from -20°C to +50°C  
On-Off Control - (Code: .N000)

## OPTIONAL

DALI - (Code: .DXXX)  
1-10V - (Code: .MXXX)  
Tunable White  
Flicker-free - (Code: .FXXX)  
Emergency battery - (Code .X3HT)  
CBS connection  
UGR<19 - microprismatic diffuser (.MC)  
Color rendering index: CRI >90  
Color temperature (K) options  
GST type connector for installation  
RAL colour selection

## INSTALLATION

Ceiling recessed mounted.

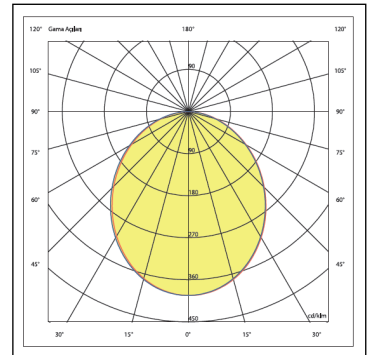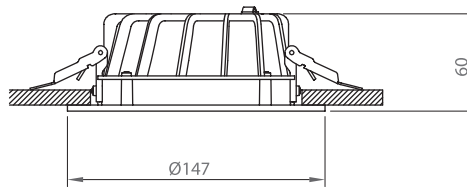

Product Code	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimensions QxH (mm)	Cut-Out Q (mm)	Weight (kg)
05397.15.30.010	10	1000	3000K	Ra>80	147x60	130	0,9

All electrical values given are rated values. Luminous flux and connected electrical load are subject to an initial tolerance of +/- 10%. Tolerance of colour temperature: +/-150 K. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Any information including technical parameters and product codes may differ from standard products in catalogue & web site due to customization made per projects.

Ikizler Lighting has the right to make changes or cancellations on the products without notification. Updated information on the products can be received from our web site.

